


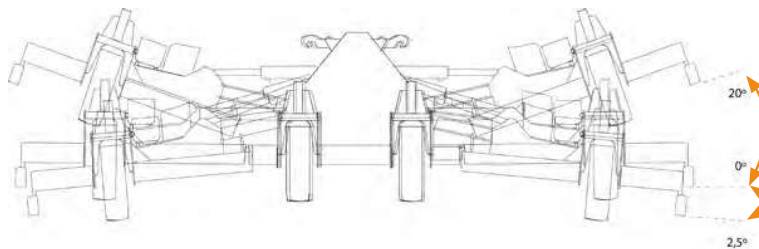
# DXP3

## ROTARY BRUSH CUTTER

- 1 Made with 3 hydraulic foldable independent bodies.
- 2 Floating side bodies for a perfect adjustment to the ground.
- 3 Protection at front and rear by chains.
- 4 Skids adjustable on height and with soles made of wear resistant steel.
- 5 Rear 360° directional wheels with shock-absorbers (18/7-8").
- 6 Three point linkage made of steel sheet metal.
- 7 3 rotors with interchangeable chains (standard) or blades Optional. "Flow-up" rotors ROTORS with 1 or 2 cutting levels Optional.
- 8 Chains/blades assembled with pins (rotors RV01).
- 9 Blades assembled with bolts and bushings (optional rotors RV15 and RV16).
- 10 Gearbox input to 540 rpm and 1 3/4" Z20 shaft.
- 11 System for guiding the material.
- 12 Maximum working angles on side wings: +20° / -2,5°.
- 13 PTO shaft included with 1 3/8" Z6 tractor side.



MOD.			DXP3-300	DXP3-320	DXP3-360	DXP3-400	DXP3-450	
TECHNICAL FEATURES								
Working width (m)			3,00	3,20	3,60	4,00	4,50	
Total width (m)			3,14	3,34	3,74	4,14	4,64	
Required input power (HP)			85	90	100	100	110	
Max. allowed power (HP)			125					
Gearbox input speed (rpm)			540					
Nr. of rotors			3					
Nr. of blades	simple		6					
	doubles		12					
Coupling category			Cat. 2					
Skids			Adjustable in height (3 positions)					
Adjustable height control			Rear wheels / Skids					
PTO shaft			PTO shaft with clutch					
Free wheel			Optional					
Weight (kg)			1.615	1.720	1.840	1.990	2.190	
Transport width (m)			2,02	2,03	2,13	2,17	2,31	
Working reach 			mechanical (mm)	1.500-1.500	1.600-1.600	1.800-1.800	2.000-2.000	2.250-2.250
REF. MOD.			VM4D30	VM4D32	VM4D36	VM4D40	VM4D45	
OPTIONS								
227	Rotor RV01 assembled with blades							
301	Rotor RV15 assembled with blades							
302	Rotor RV16 assembled with blades (2 cutting height levels)							
091	Removable light panels							
285	Solid tyres (18/7-8")							
226	PTO shaft with free wheel incorporated on clutch							
313	Replaceable counterblades compatible with rotors with blades with 2 cutting height levels							
337	Central rear roller (without central wheels)							
085	Central rear roller (mixed with wheels)							
322	Rear side Rollers (without side wheels)							
OTHERS								
PTO shaft yoke (tractor side)			T1	T2	T3	T4	T5	
			1 3/8" Z6	1 3/8" Z21	1 3/4" Z6	1 3/4" Z20	D8x32x38	



RV01 Standard

RV01 Optional

RV15 Optional

RV16 Optional

A07 Counterblade Optional

