

TDJ

MULCHER

- 1 Body built in high strength steel.
- 2 Parallelogram offset with mechanical anticollision device.
- 3 Protection at front with metallic plates and rubbers on the sides.
- 4 Float device on three point linkage to control ground adaptation as well as impacts during transport.
- 5 Internal rear roller with height adjustment for ground adaptation and protection skids.
- 6 Rotor with fixed hammers with helical disposition and with "P-CUT" depth bite limiters.
- 7 Transmission with 6 XPB belts and automatic tensioner.
- 8 Transmission to the gearbox with intermediate shaft with omnidirectional adjustment (patent pending).
- 9 Gearbox with built-in free wheel and 1 3/4" Z6 input shaft.
- 10 Input to 540 rpm.
- 11 Replaceable counterblade model C01.
- 12 Reversible carbide hammers F09 TMC Cancela (standard).
- 13 PTO shaft included with 1 3/8" Z6 tractor side.



MOD.		TDJ-180	TDJ-200
TECHNICAL FEATURES			
Working width (m)		1,80	2,00
Total width (m)		2,06	2,26
Required input power (HP)		110	120
Max. allowed power (HP)		200	
Rotor/s cutting diameter (mm)		490	
Gearbox input speed (rpm)		540	
Nr. of hammers	F09 + F39 / F08 + F38	42 + 2	46 + 2
Coupling category		Cat. 2 / Cat. 3	
Nr. of belts - type		6 XPB	
Skids		Fixed bolted (1 position)	
Adjustable height control		Rear roller	
Weight (kg)		1.482	1.509
Transport width (m)		1,50	
Working reach 	hydraulic (mm)	1.013-2.894	1.013-3.094
REF. MOD.		HM2J18	HM2J20


OPTIONS			
340	Rotor mounted with hammers F08		
411	Replaceable rotor shafts		
233	Roller scraper		
273	Protection at front with chains		

KM1.F09.2J	Maintenance basic kit (2 hammers F09 + 2 bolts + grease)		
KM2.F09.2J	Maintenance kit (basic kit + 6 belts XPB)		
KM1.F08.2J	Maintenance basic kit (2 hammers F08 + 2 bolts + grease)		
KM2.F08.2J	Maintenance kit (basic kit + 6 belts XPB)		

OTHERS

PTO shaft yoke (tractor side)	T1	T2	T3	T4	T5
	1 3/8" Z6	1 3/8" Z21	1 3/4" Z6	1 3/4" Z20	D8x32x38

EM	Iron support (pallet)	
EE	Packing Export	

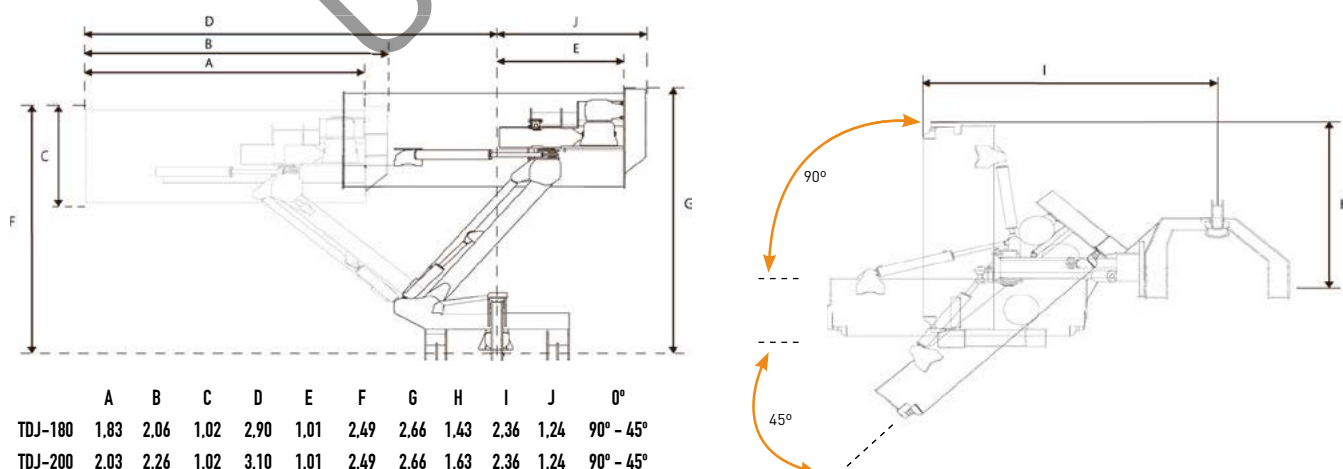

Hammer F09 Standard Hammer F08 Optional Hammer F39 Standard (sides) Hammer F38 Optional (sides) Counterblade C01 Standard

