


TGD

MULCHER

- 1 Body built in high strength steel with an hydraulic shifting three point linkage.
- 2 Protection at front with chains.
- 3 Protection skids.
- 4 Rear steel Picks for rake Optional.
- 5 External rear roller for ground adjustment.
- 6 Rotor with floating hammers assembled to the rotor with bolts of 27 mm diameter (Boltop system).
- 7 Transmission with 5 belts.
- 8 Gearbox with built-in free wheel with 1 3/4" Z6 input shaft.
- 9 Input to 540 rpm. In option 1.000 rpm by inversion of pulleys (DS system).
- 10 Replaceable counterblades TMC Cancela model C01.
- 11 PTO shaft included with 1 3/8" Z6 tractor side.

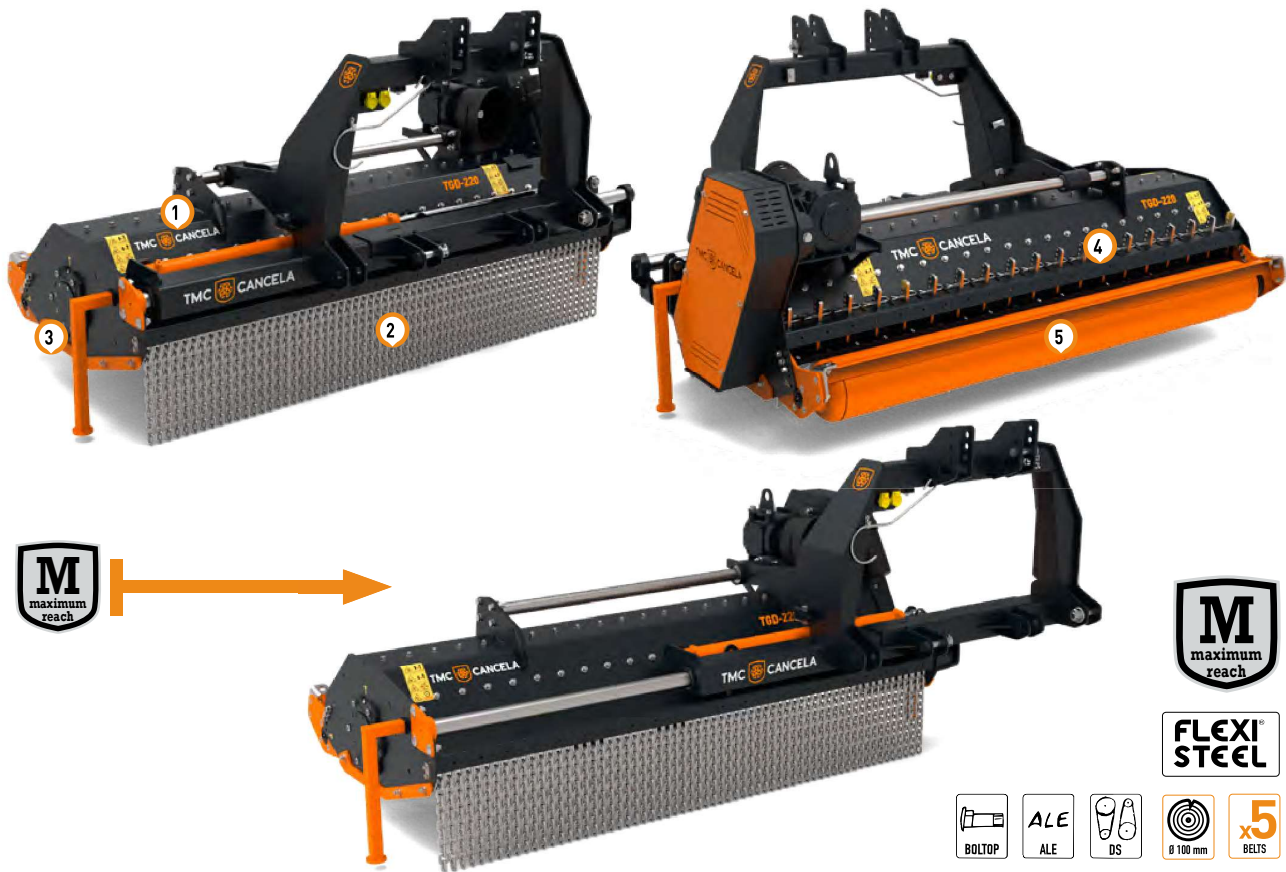

MOD.			TGD-200	TGD-220	
TECHNICAL FEATURES					
Working width [m]			2,00	2,20	
Total width [m]			2,24	2,44	
Required input power [HP]			80	85	
Max. allowed power [HP]			150		
Rotor/s cutting diameter (mm)			435		
Gearbox input speed (rpm)			540 (1.000 as option)		
Nr. of hammers	A18		20	22	
Counterblades			3 replaceable rows + 1 fixed row		
Coupling category			Cat. 2		
Nr. of belts - type			5 XPB		
Skids			Fixed bolted (1 position)		
Adjustable height control			Rear roller		
Weight [kg]			1.065	1.125	
Hydraulic cylinder stroke (mm)			900	1.000	
Working reach		hydraulic 1 (mm)	1.033-1.902	1.033-2.202	
		hydraulic 2 (mm)	683-2.253	683-2.553	
REF. MOD.			HM8S20	HM8S22	
OPTIONS					
024	Rubber protection at both front and rear				
135	Configuration with a gearbox input to 1.000 rpm				
233	Roller scraper				
248	Lateral control wheel (18/7-8")				
364	Side directional wheels (without roller)				
373	Right reinforced skid				
296	Configuration with centered 3 Point linkage				
141	Tines for rake				
P03	Replaceable internal frame in wear resistant steel				
385	Side disc trimmer Ø600 mm (with nylon cord)				
386	Side disc trimmer Ø800 mm (with nylon cord)				
387	Side disc trimmer Ø600 mm (with blades)				
388	Side disc trimmer Ø800 mm (with blades)				
KM1.A18.8S	Maintenance basic kit (2 hammers A18 + 1 bolt + 1 nut + grease)				
KM2.A18.8S	Maintenance kit (basic kit + 5 belts XPB)				
OTHERS					
PTO shaft yoke (tractor side)	T1	T2	T3	T4	T5
	1 3/8" Z6	1 3/8" Z21	1 3/4" Z6	1 3/4" Z20	D8x32x38

Side disc Optional



Hammer A18 Standard

Counterblade C01 Standard

