
TGL

MULCHER

1 Body built in high strength steel.
2 Protection at front by metallic plates (chains optional).
3 Protection skids.
4 Rear roller for ground adjustment.
5 Offset three point linkage with an hydraulic cylinder (maximum offset).
6 Foldable rear cover to enable the cutting tools replacement.
7 Rotor with floating hammers assembled to the rotor with 27 mm bolt (Boltop system).
8 Transmission with 4 belts and an automatic tensioner.
9 Gearbox with built-in free wheel and input shaft 1 3/8" Z6.
10 Transmission at 540 rpm. Optional at 1.000 rpm reversing the pulleys (DS system).
11 Replaceable counterblades TMC Cancela model C01.
12 Internal replaceable body shell in stainless steel Optional.
13 Rear rake with Picks to retain the material.
14 PTO shaft included with 1 3/8" Z6 tractor side.

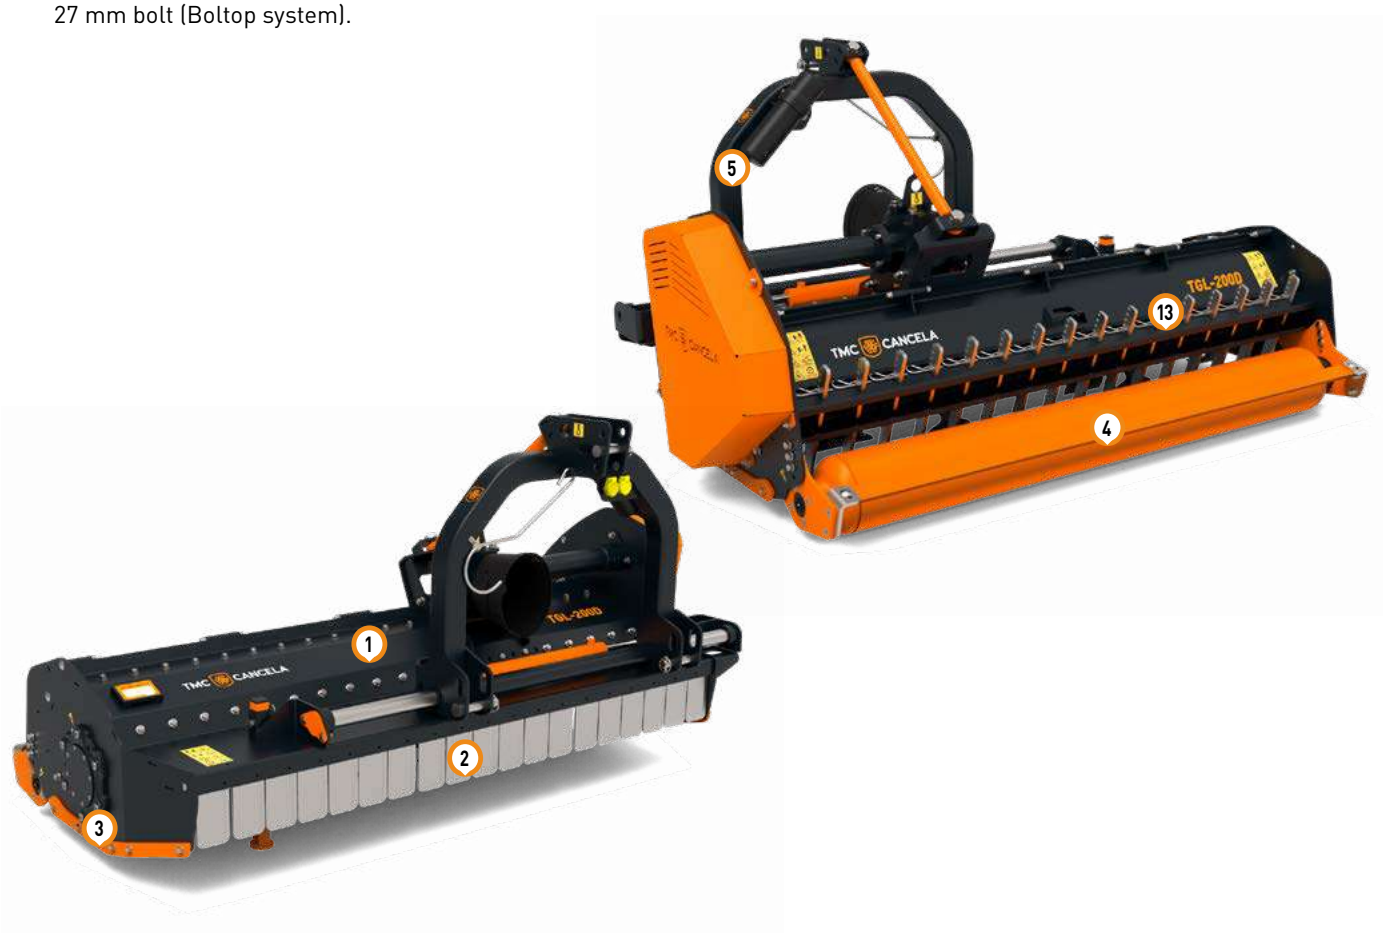

MEDIA

FLEXI STEEL
ESB
ALE
ALE
DS
Ø 70 mm
x4
BELTS

TMC CANCELA

MOD.			TGL-180D	TGL-200D	TGL-220D
TECHNICAL FEATURES					
Working width (m)			1,80	2,00	2,20
Total width (m)			2,02	2,22	2,42
Required input power (HP)			70	80	85
Max. allowed power (HP)			90		
Rotor/s cutting diameter (mm)			435		
Gearbox input speed (rpm)			540 (1.000 as option)		
Nr. of hammers	A18		18	20	22
Counterblades			2 replaceable rows (Optional)		
Coupling category			Cat. 2N / Cat. 2		
Nr. of belts - type			4 XPB		
Skids			Fixed bolted (1 position)		
Adjustable height control			Rear roller		
Weight (kg)			700	740	800
Hydraulic cylinder stroke (mm)			500		
Working reach 		Hydraulic offset (mm)	917-1.418	917-1.618	917-1.818
		Hydraulic centered (mm)	917-1.418	1.017-1.518	1.017-1.680
REF. MOD.			**HM5Q18**	**HM5Q20**	**HM5Q22**

OPTIONS	
141	Tines for rake
282	Stainless steel replaceable internal body shell
P03	Replaceable internal frame in wearing resistant steel (compatible with replaceable counterblades)
259	Protection at front with chains
233	Roller scraper
135	Configuration with a gearbox input to 1.000 rpm
296	Configuration with centered 3 Point linkage
372	Maximum side reach kit
242	Rubber protection at front
385	Side disc trimmer Ø600 mm (with nylon cord)
386	Side disc trimmer Ø800 mm (with nylon cord)
387	Side disc trimmer Ø600 mm (with blades)
388	Side disc trimmer Ø800 mm (with blades)
KM1.A18.5Q	Maintenance basic kit (2 hammers A18 + 1 bolt + 1 nut + grease)
KM2.A18.5Q	Maintenance kit (basic kit + 4 belts XPB)

OTHERS				
PTO shaft yoke (tractor side)	T1	T2	T3	T4
	1 3/8" Z6	1 3/8" Z21	1 3/4" Z6	1 3/4" Z20

Hammer A18 Standard



Counterblade C01 Standard



Side disc Optional

