


TOZ

MULCHER


- 1 Body built in high strength steel.
- 2 Fixed bolted three point linkage.
- 3 Hydraulic double reinforced pick-up feeder with independent speed adjustment.
- 4 Entry size adjustable (adjustable top feeder by hydraulic cylinders).
- 5 Rear fixed wheels with height adjustment.
- 6 Gearbox with built-in free wheel with 1 3/4" Z6 input shaft.
- 7 Mulching system with an open chamber (direct to the ground).
- 8 Rotor with fixed hammers with patented mulching system.
- 9 Transmission with 6 belts and automatic tensioner.
- 10 Pick-up hydraulic motor with a side extension shaft with bearings.
- 11 Replaceable counterblades made in wear resistant steel.
- 12 Input to 1.000 rpm. As option 540 rpm by inversion of pulleys (DS system).
- 13 PTO shaft included with 1 3/8" Z6 tractor side.



FORWARD DIRECTION

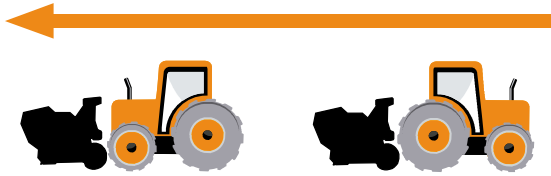

MEDIA

MOD.		TOZ-210	TOZ-240		
TECHNICAL FEATURES					
Working width (m)		2,10	2,40		
Total width (m)		2,60	2,90		
Required input power (HP)		140	150		
Max. allowed power (HP)		200			
Rotor/s cutting diameter (mm)		600			
Gearbox input speed (rpm)		1.000 (540 as option)			
Nr. of hammers	A06	26+26	30+30		
Counterblades		3 replaceable rows			
Coupling category		Cat. 2			
Nr. of belts - type		6 XPB			
Adjustable height control		Wheels			
Weight (kg)		2.065	2.350		
Working reach 	mechanical 1 (mm)	1.050-1.050	1.200-1.200		
REF. MOD.		HM3L21	HM3L24		
OPTIONS					
134	Configuration with a gearbox input to 540 rpm				
136	Tines for rake				
137	Double kit of tines for the rake				
285	Solid tyres (18/7-8")				
286	Progressive gearbox starter				
KM1.A06.3L	Maintenance basic kit (2 sets of hammers A06 + 2 bolts + grease)				
KM2.A06.3L	Maintenance kit (basic kit + 6 belts XPB)				
OTHERS					
PTO shaft yoke (tractor side)	T1	T2	T3	T4	T5
	1 3/8" Z6	1 3/8" Z21	1 3/4" Z6	1 3/4" Z20	D8x32x38

MULCHERS

BRUSHCUTTERS

GREENHOUSES

STRADDLE TRACTORS

LOG SPLITTERS

ANNEX

Hammer A06 Standard

